


FOR USE WITH 240VAC HEATERS

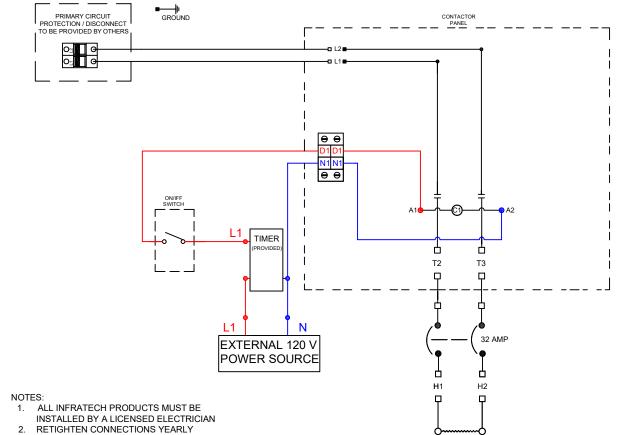

NOTE: MAX 32-AMPS PER BREAKER

FOR USE WITH 208VAC HEATERS


208VAC SINGLE PHASE INPUT

HOUR MAX TIMER

HOUR MAX TIMER

TYPE 1 ENCLOSURE- INDOOR USE ONLY NOT COMPATIBLE WITH INF CONTROLS DESIGNED FOR USE WITH ENCLOSED 4

240VAC SINGLE PHASE INPUT

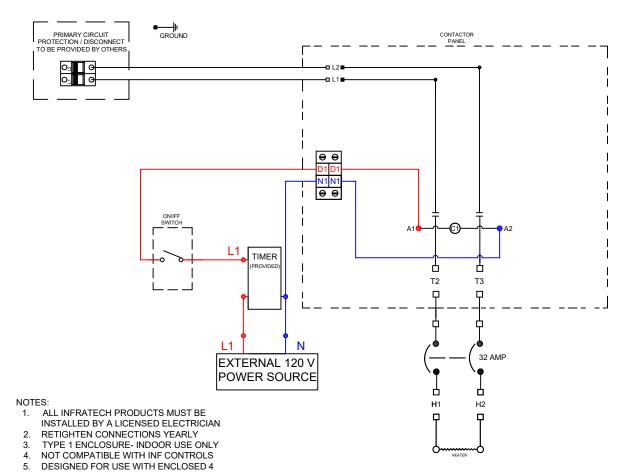

NOTE: MAX 32-AMPS PER BREAKER

CONTACT INFRATECH FOR A CUSTOM CONTACTOR PANEL.